SPS one

UPS 500 - 900 VA WITH AVR + SOFT / USB

SPS ONE: Computing & entertainment environments home + office advance protection

Increasing introduction and use of home and/or little offices and business computing systems plus dealt with valuable information and stored within, proof essential Uninterruptible Power Supply (UPS) **SALICRU's SPS.ONE** series. Such equipment forward maximum electrical protect due to AVR Boost & Buck technology – continuous voltage stabilisation-, phone / data / modem protect, equipment control and file closing via fitted ViewPower software – via USB 2.0 connect – plus all-connect money guarantee included – up to 90.000 € –.

Furthermore, optimum protect for leisure and home bliss being multimedia audiovisual environments, **SPS.ONE** series available 500, 700 and 900 VA power, up to 20 minutes back up time.

PERFORMANCES

- Line-interactive technology.
- Hi-reliability ensured via microprocessor control.
- AVR Boost & Buck stabilisation.
- Up to 20 minutes support back-up.
- Monitoring and management software included.
- USB port connect.
- Phone / data / ADSL protect.
- Single on/off button for ease and comfort sake.
- OK, battery or failure status indicators.
- Intelligent battery charger, saving 50% charging time.
- Cold-start start-up function.
- Battery charge function with equipment off.
- Charge connect ease via schuko power point.
- Overload, short-circuit and transient protect.

SPS One

APPLICATIONS

SPS.500.ONE	SPS.700.ONE	SPS.900.ONE	OTHER APPLICATIONS
PC + Data line + Inkjet printer	2x PC + Data line + Inkjet printer	2x PC + Data line + 2x Inkjet printer + HDD	HI-FI, TV, DVD, TV decoder, Home Cinema

SPS ONE

UPS 500 - 900 VA WITH AVR + SOFT / USB

3 YEARS WARRANTY
ASK FOR LOCAL CONDITIONS

ELECTRICAL insurance

Cover money guarantee included all-connect equipment. Consult equipment included terms.

- SPS.500.ONE → 50.000 €
- SPS.700.ONE → 70.000 €
- SPS.900.ONE → 90.000 €

SOFTWARE ViewPower

- UPS and closing monitoring software files/applications. Compatible with Windows, Unix, Linux and Mac.

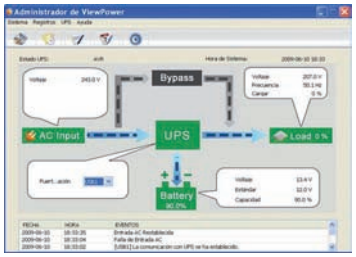

Microsoft Windows Compatible · Unix · Mac · Linux Powered

100% SOLVING

- **SPS.ONE** UPS series.
- Communication wiring SAI/PC USB.
- CD software ViewPower.
- Phone / data / ADSL line cable.
- Instructions handbook.
- Warranty certificate.
- Electrical insurance.

PACKAGING

- Retail show maximum information.

SALICRU's guarantee

- On-line register at www.salicru.com.
- Batteries within warranty.

TECHNICAL SPECIFICATIONS

MODEL		SPS.500 ONE / SPS.700 ONE / SPS.900.ONE
TECHNOLOGY		Line-interactive
INPUT	Nominal voltage	230 V
	Voltage margins	'till 162 V - 290 V
	Nominal frequency	50 / 60 Hz
	Frequency self-detect	Yes
	Stabilisation	AVR Buck / Boost
OUTPUT	Voltage	230 V
	Voltage precision (1)	±10%
	Frequency (1)	50 / 60 Hz ± 1 Hz
	Waveform (1)	Pseudo-sinusoidal
	Type & back up time socket nr.	Schuko x 2
	Transfer time	2 / 6 ms
PROTECTION	Input	Thermal re-arm
	100% protect	Charger overload, discharge, short-circuit and power surge
	Data line (RJ45)	Tel/fax, modem, internet ADSL
BATTERIES	Type	Enclosed batteries Pb-Ca without maintenance, sealed, useful life 3-5 years
	Recharging time	4-6 hours 'till 90% capacity
	Back up time	Up to 20 minutes
FUNCTIONS	Cold start-up (ColdStart)	Yes
	Autotest	On each start-up
	Automatic re-start	Yes, after self-support end
INDICATIONS	Mains present	Green LED
	Battery mode	Yellow LED
	Failure	Red LED
	Alarm	Output battery mode, low battery (back up time), battery replacement, charger failure and overload
COMMUNICATIONS	Port	USB 2.0
	Software	Compatible with Windows, Linux, Unix and Mac
GENERALS	Maximum altitude	2400 m.a.s.l.
	Relative humidity	'till 90%, without condensation
	Temperature	0º C ÷ + 40º C
	Acoustic noise up to 1 metre	< 40 dB
STANDARDS	Security	EN 62040-1-1; EN 60950-1
	Electromagnetic compatibility (CEM)	EN 62040-2
	Marking	CE
	Quality & environmental management	ISO 9001 and ISO 14001 TÜV

(1) Battery mode.

Data may change without previous notice.

RANGE

MODEL	POWER (VA)	DIMENSIONS (D x W x H mm)	WEIGHT (Kg)	PALLET GROUP PACKING		PALLET	
				Units	Weight (Kg)	Units	Weight (Kg)
SPS.500.ONE	500	287 x 100 x 142	3,55	4	15,8	64	279,8
SPS.700.ONE	700	287 x 100 x 142	4,25	4	19,6	64	340,6
SPS.900.ONE	900	287 x 100 x 142	4,9	4	21,4	64	369,4

Group packing dimensions: 593 x 342 x 240 (D x W x H, mm)
Pallet dimension: 1.200 x 800 x 1.140 (D x W x H, mm)

902 48 24 00*
+34 93 848 24 00**
WWW.SALICRU.COM

salicru
AVDA. DE LA SERRA 100 · 08460 PALAUTORDERA · SPAIN · FAX +34 93 848 11 51

(*) Spain only (**) Rest of world

REF. JM701A01 CODE 401AB000515 ED. JANUARY 2011